

Meeting Today's Challenges to Provide a Secure Future




## U3600 LCC

An advanced version of the market's smallest, lightest 320 x 240 thermal imaging detector, the low-cost U3600 LCC offers a 17 micron pixel pitch focal plane array for even sharper displays. This uncooled sensor, designed especially for commercial applications, incorporates vanadium-oxide technology for long-wave infrared detection.

Weighing less than 4 grams and measuring just 1.83 x 1.83 x 0.37 cm, the U3600 LCC features a low-profile, surface-mountable ceramic leadless chip carrier (LCC) that can be mounted to any printed circuit board using a LCC socket. Its ability to create crystal-clear thermal images in challenging environmental conditions and even total darkness is maintained by on-chip temperature feedback, which eliminates the need for a thermoelectric cooler.

The U3600 LCC is ideal for commercial products requiring an exceptionally compact and lightweight imaging capability, including security, surveillance and monitoring systems.

- Focal plane array features 17 micron pixel pitch
- Lighter and more compact than any competing 320 x 240 detector
- Low cost infrared solution
- Uncooled vanadium-oxide technology
- Low-profile, surface-mountable ceramic leadless chip carrier

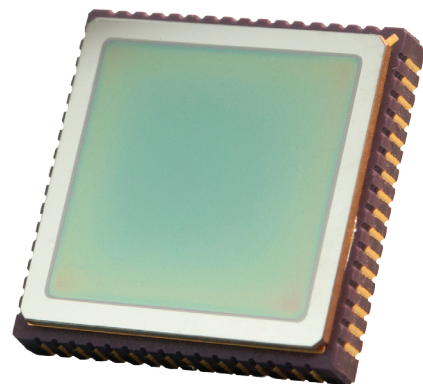

## SYSTEM FEATURES

### FOCAL PLANE ARRAY

Detector Type	Uncooled VOx Microbolometer
Array Size	320 x 240
Detector Pitch	17 $\mu$ m
Spectral Response	LWIR 8 - 14 $\mu$ m

### VIDEO

Frame Rate	60 Hz
Nominal Data Rate	5 MHz
Format	NTSC/PALCompatible

### ELECTRICAL

Power	$\leq$ 120 mW Nominal
-------	-----------------------

### PART NUMBER

1013600-001

### PERFORMANCE

Sensitivity (NETD)	<40 mK @ F/1
Multiplexer	CMOS Ripple Integration
Area Fill Factor	90%
Typical Operability	>99%
Number of Analog Outputs	1
Output Voltage Range	1.2 - 3.2 v
Time Constant	$\leq$ 14 msec
Temperature Stabilization	No TEC required (On-Chip Temperature Feedback)
On-chip Non Uniformity Correction (NUC)	7 bits parallel

### MECHANICAL

Dimensions (L x W x H)	1.83 x 1.83 x 0.37 cm (0.72 x 0.72 x 0.145 inches)
Weight	<4 g

### ENVIRONMENTAL

Operating Temperature	-40°C to +85°C
Storage Temperature	-46°C to +85°C

\* Specifications subject to change without notice.

Export of the commodities described herein is strictly prohibited without a valid export license issued by the U.S. Department of State, Directorate of Defense Trade Controls, prescribed in the International Traffic in Arms Regulations (ITAR), Title 22, Code of Federal Regulation, Parts 120-130.